

MICROBASE (A+B)

Microcement for surface preparation



Microbase is a two-component microcement in powder. Designed for surface preparation before applying finishing microcements Microdeck and Microfino. It has been formulated to be applied as a low-thickness continuous coating onto floors and walls. Topciment microcement is applied in several layers with a trowel, allowing the creation of a wide range of finishes. As part of an application system the surface should be prepared and with Microbase with products recommended by Topciment.

It is formulated of hydraulic binders, selected aggregates, synthetic resin and specific additives. Microbase (component A in powder) needs to be mixed with Acricem (component B liquid) according to the quantities specified in this technical sheet to guarantee its features.

Once mixed, the obtained product can create a coating of 1-3 mm, with high mechanical strength and strong adhesion to any type of substrates: concrete, cement-based mortars, ceramic, MDF, plaster and drywall as long as they are

Properties

- Continuous decorative coating without fissures (always respect the expansion joints).
- Applicable on countless surfaces: concrete, cement, ceramic, plasterboard, etc.
- Excellent workability.
- Wide range of colours.
- Finishes: matt, satin and gloss .
- High adhesion to substrates.

Recommendations for use

a. Surface preparation:

Prior to the application of Microbase it is necessary to prepare the surface depending on the conditions of the support to be coated. Some coatings require specific solutions like the flat and flexible fibreglass mesh Builtex, adhesion promoters such as Primacem PLUS or Primacem ABS, and vapour barriers or barriers against capillary rising damp, like Impoxy. In all cases please follow the recommendations of our technicians.

The surface should be free of dust and grease, well consolidated and in good flatness.

b. Mix:

Add Acricem resin and pigments in the recommended proportions. It is essential to respect the resin-microcement ratio to ensure the product's properties: 10 kg of Microbase – 2,5 / 3,0 litres of Acricem resin

c. Mortar preparation:

The mortar must be prepared as follows:

1. Pour some Acricem resin into a container; then add the entire load of pigment corresponding to the amount of microcement and mix until an even, coloured liquid is obtained.
2. Pour the microcement powder gradually into the resin while mixing the product with a low speed mixing drill.
3. Mix for at least 4 minutes until a smooth mixture free of lumps is obtained.

d. Consumption:

The consumption depends on the surface. In a standard application it would be as follows:

Microbase (2 layers) – 2.00 kg/m²

The better the levelling and preparation of the surface to be coated, the better the consumption and the lower the time of installation. It is advisable to choose the suitable method for each application.

Technical data

Type:	Two-component microcement
Appearance:	White powder
Maximum size of the aggregates:	0.4 mm
Apparent density:	In powder – 1175 ± 50 kg/m ³ In mortar – 1480 ± 50 kg/m ³ Hardened – 1430 ± 50 kg/m ³ (28 days)
Compressive strength (EN 13892-2):	28 days: ≥ 30 N/mm ²
Flexural strength (EN 13892-2):	28 days: ≥ 10 N/mm ²
Adherence strength (EN 13892-8):	28 days: ≥ 1.5 N/mm ²
Fire resistance (EN 13501-1):	B _{FL} s1

Application

a. Application layers:

Apply one or two layers of Microbase with a steel trowel depending on the type of surface. On floors always apply two layers and use the flexible fibreglass mesh Builtex. Before applying a new layer, the previous one needs to be sanded with a random orbital sander and with a 40-grit sandpaper to remove irregularities.


b. Finishing or setting coat:

The application can be finished with a third coat of Microbase using the “fresh on fresh” technique. Microdeck can be installed onto floors in two layers and Microfino is used exclusively onto walls and non-trafficable surfaces.

“Fresh on Fresh”

Microbase can be applied with the “fresh on fresh” technique by installing the third coat as soon as the second one is tack-free (non-sticky to the touch). No sanding is required for the second layer of Microbase when using this technique. Should you find burrs or bumps, smooth them out with a spatula and cut the rough edges. Work on an extruded polystyrene board to apply the following layer. Lightly sand the surface with a random orbital sander or with the 40-grit sandpaper gloves to remove imperfections once the material has dried (once the colour tone changes and intensity becomes lighter).

Do not apply layers of Microbase, Microdeck and Microfino thicker than 1 mm. We recommend a total thickness of the combined layers of 3 mm.

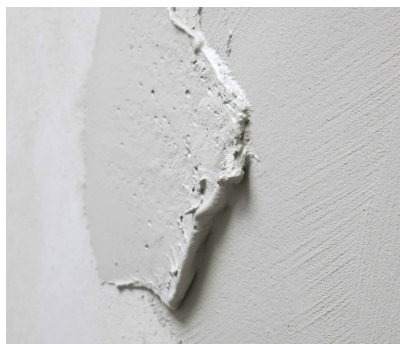

c. Sealing:

Topciment microcements should be sealed once they have hardened, after 24-48 hours. Sealing shall be done after the coating reaches humidity lower than

5 %, measured with tools designed for this purpose. Topciment microcements can be sealed with primer Prepol/Presealer and with water-based varnish Topsealer WT, or with solvent-based varnish Topsealer DSV. We highly recommend to follow carefully the application instructions of technical datasheet.

Special precautions

This product contains cement.

- Avoid contact with eyes and skin, as well as powder inhalation.
- Use rubber gloves and safety glasses.
- Apply this product at ambient temperature between 10°C and 30°C.

Both low and high temperatures might vary the pot life and drying times considerably.

Empty containers must be disposed of in accordance with current local regulations. Keep out of the reach of children.

Packaging

Available in 10 kg and 20 kg buckets.

Cleaning of the tools

Tools should be cleaned with water immediately after use. Once the material has hardened, it can only be removed by mechanical means.


Pot life

The Pot life is of 1 hour at about 20°C.

It is advisable to mix quantities in accordance with the experience of the applicator.

Storage conditions

The product should be stored in its closed original packaging, protected from weather conditions at temperatures between 10°C and 30°C, in a dry and well ventilated place away from direct heat and sunlight. Shelf life is 12 months from the date of production if stored in well-preserved conditions.

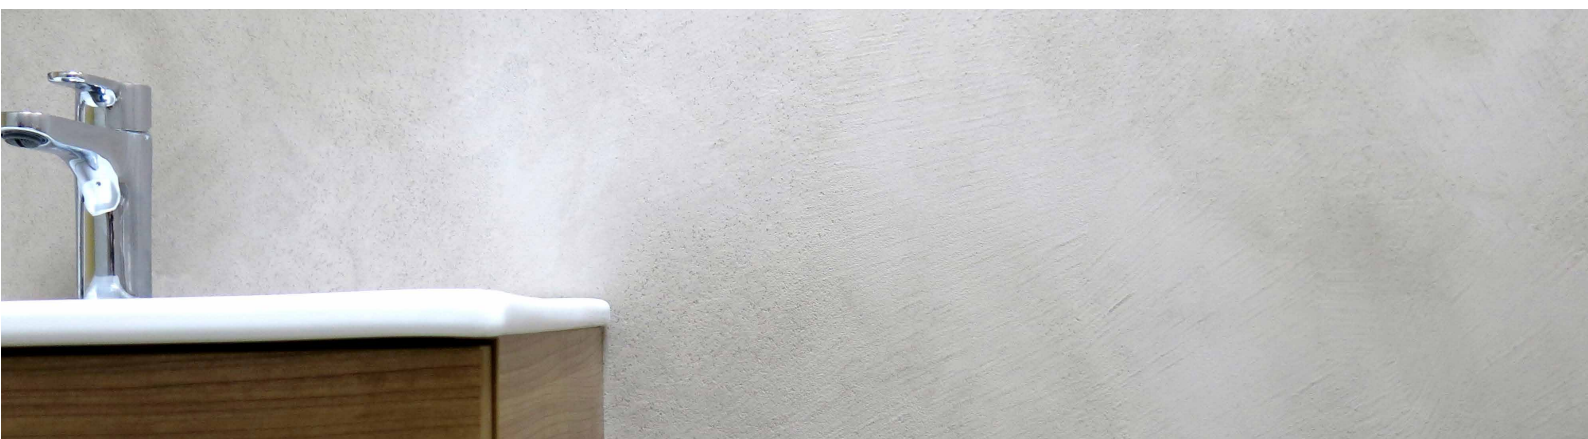

The product should not be used for purposes other than those specified without first having instructions in writing. It is always the user's responsibility to take suitable measures in order to comply with the requirements established in local legislation. Product safety sheets are available for professionals. This technical data sheet will be valid until a new edition appears.

Last updated: June 2017